

[Products] you can identify with




Physical Specifications

Material	White synthetic label
Size	100 x 24 x 1.3 with ground plane (+/- 2) mm 3.78 x 0.94 x 0.05 with ground plane (+/-0.07) in
Weight (g)	2.0
Attachment	Self-adhesive and suitable for curved surfaces to a minimum radius of 58mm

Product dimensions shown above are the maximum. Batch to batch variation could be within 5%. Unspliced sections will be within 0.2mm tolerance

Dimensions

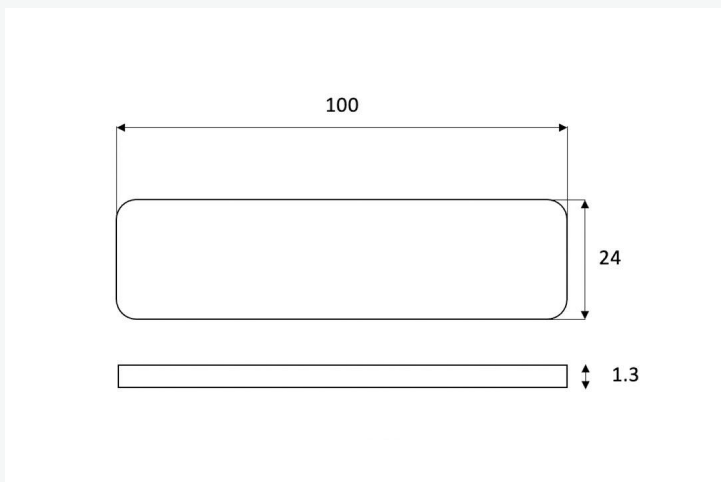

Measurements shown in mm

IQ 600 Regional R6-P

Omni-ID IQ 600 Regional R6-P ultrathin labels provide on metal tag functionality, within a low profile label. Supplied in roll form, the tag has been optimized for thermal barcode printers, enabling low cost and hassle-free RFID deployment. The consistency and reliability of the tag redefines the standard for on and off metal RFID tagging, enabling new applications and revolutionizing integration into manufacturing and supply chain processes.


RF Specification

Radio Protocol	EPC Class 1 Gen2v2
Frequency Range	866 – 868 MHz (EU) 902 – 928 MHz (US)
Read Range – Fixed Reader	Up to 6m (19.68 feet)
Read Range – Handheld Reader	Up to 3m (9.8 feet)
On Metal or Balanced	Optimized for metal
Material Compatibility	Metal, Plastic, Ceramic
IC Type (Chip)	Monza R6-P
Memory	EPC - 128 (96) bits User - 32 (64) bits Unique TID - 48 bits


Quoted performance achieved using standard testing methodology on Aluminium test plates. Read range is dependent on multiple factors such as; RFID reader transmit power and receiver sensitivity, asset material and environment. Please see the Omni-ID On Metal Labels User Guide for more detail. EPC and User memory are reprogrammable. UTID is locked at point of manufacture by IC manufacturer.

Radiation Patterns

On Metal

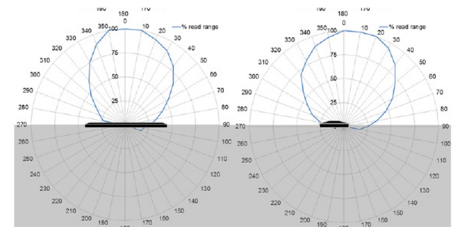

Off Metal

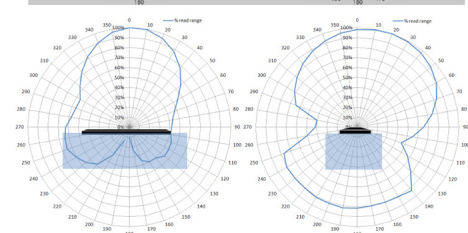

[Products] you can identify with



With innovative construction and thermal barcode printer compatibility, the Omni-ID IQ 600 label is ideal for applications such as:

- Logistics involving metal produce or packaging
- Pipe manufacturing and re-certification
- IT, office & hospital assets tracking applications

Environmental Specifications

Operating Temperature	-40°C to +85°C
Max Temperature Exposure	-40°C to +85°C
Application Temperature	+18°C to +35°C
IP Rating	IP68
Printer Compatibility	SATO

Certifications

CE, RoHS



Ordering Information

Warranty	1 year	
Product Options	133 – EU, US with Monza R6 -P :303 Customization - 4 color static print :315 Overlamination :536 Textured surface adhesive :701 (Standard Service Bureau)	
Part Number / Order Codes / Order Numbers	133 – EU, US with Monza R6 -P	
Supply Format	500 labels per roll	
Minimum Order Quantity	Standard Label R6-P	500 labels (1 roll)
	Service Bureau R6-P	500 labels (1 roll)
	Customization R6-P	10,000 labels
	Overlamination R6-P	10,000 labels

株式会社サイレンスネット www.silencenet.com

〒222-0033 横浜市港北区新横浜2-5-9 新横浜フジカビル
tel. 045-475-1555 fax. 045-475-3275

For product or technology inquiries email: sales@omni-id.com.
Visit omni-id.com to learn more about the complete line of **Omni-ID RFID** products