


Product profile

EA11

Decoded 2D Imager
Standard Range

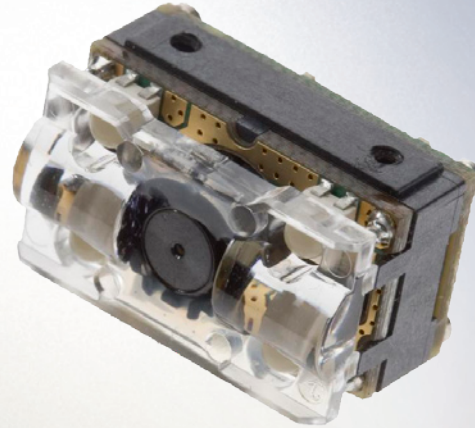

- Reads 1D and 2D barcodes omni-directionally – Complies with new industry standards and future proofed
- Best in class scan rate: Up to 60 scan/s (2D) and 200 scans/s (1D) – Insures productivity in intensive use
- Very compact design – available with the industry smallest USB 2.0 decode board, to fit the tightest mechanical constraints
- Plug compatible with Intermec imagers' family (1D & 2D) – leverages and eases your design efforts
- 2 optics are available, standard and high-density – meets your customer requirements
- Highly durable design – Built to withstand harsh environments

The EA11 combines decode speed with exceptional motion tolerance to deliver an easy to use scanner with aggressive performance. Based on state-of-the-art CMOS technology & Intermec advanced decoding its scanning speed is twice as fast as traditional 2-D imagers. Using the latest Intermec algorithms, the EA11 decodes down to one pixel per dot, providing an outstanding decode performance even on poorly printed or damaged barcodes. In addition, the EA11 offers uncompromised performance on linear barcodes by delivering very high scan rates (up to 200 scans per second), more than five times faster than traditional 2-D imagers.

Everything has been done to simplify the integration of the EA11 engine: Compact size, multiple mounting possibilities, low power operation, high speed USB 2.0 & RS232 standard interfaces. The EA11 is compatible with other Intermec decoded engines enabling an easy transition from linear to bi-dimensional scan engines. It allows end users to leverage their integration efforts across multiple OEM

product platforms, reducing time to market and insuring easier product migration. To ease the mechanical integration into a large variety of host devices, the EA11 is available either as an integral engine or separated engine and decode board. The EA11 is available with two options on decode platforms. The ED30 for standard performance, simple interface and most economical. The ED40 where applications, interfaces and performance are more demanding. ED40 is the smallest USB 2.0 decode board in the industry: It not only increases decoding performances but also support applications such as video and image capture.

The EA11 is built to match the most demanding scanning requirements, providing consistent scanning performance in total darkness to full sunshine and over a large temperature range.

The EA11 is based on solid state technology and complies with the most stringent standards for exposure to shock and vibration.

Physical Characteristics

Scan engine: 20.9 mm W x 14.0 mm D x 12.4 mm H
(.8 in W x .55 in D x .5 in H)
Decode board (ED40): 34 mm W x 19 mm D x 5.6 mm H
(1.34 in W x .75 in D x .22 in)
Weight: 10g
*Mounting of the scan engine on the decode board
(bracket mounted) is optional*

Scanning Performances

Scan Rate: 2D mode: 56 images/s auto adaptive
Linear emulation mode: 200 scans/s auto adaptive
Scan angle: 38.9° (Horizontal), 25.4° (Vertical)
Optical resolution: 752 (H) x 480 (V) pixels,
256 gray levels
Print Contrast: down to 25%
Versions: Standard range and high density

Symbologies

1D symbologies: EAN/UPC, GS1 Databar (limited expanded & omni-directional), RSS, Code 39, Code 128, UCC/EAN 128, ISBN, ISBT, Interleaved/Matrix/Industrial and Standard 2 of 5, Codabar, Code 93/93i, Code 11, MSI, Plessey, Telepen, postal codes (Australian Post, BPO, Canada Post, Dutch Post, Japan Post, PostNet, Sweden Post)
2D symbologies: Data Matrix, PDF417, Micro PDF 417, Codablock Maxicode, QR, Aztec GS1 composite codes

Interfaces

High speed USB 2.0, RS232 TTL with Intermec Scanner Control Protocol (ISCP)

Connection

Optics to decode board: 21 contact ZIF connector, pitch 0.3mm/0.12 in.
Decode board to host: 12 pin ZIF connector, pitch 0.5 mm/0.2 in.

Electrical Characteristics

Optics, typical values:

Voltage: 3.3V -5%/+10%
Operating current: 170mA - 310mA
(lighting condition dependent)

Optics + decode board, typical values:

Voltage: 3V to 5.5V
Operating current: decode board & voltage dependent;
refer to the ED30 & ED40 Integration Guides for detailed information
Power saving mode: 2mA

Environmental Characteristics


Ambient light: Works in any lighting conditions,
from 0 to 100 000 lux
Operating temperature: -20° to 60° C (-4° to 140° F)
Storage temperature: -30° to 70° C (-22° to 158° F)
Relative humidity: 5% to 95% (non-condensing)
Shock: 2000G, 0.7ms, half sinus, 3 axes
Vibration: 8G r.m.s., from 10Hz to 500Hz,
2 hours/axis, 3 axes

Regulatory Approvals


UL recognized component, VDE certified, RoHS Compliant

Typical reading distances

EA11 Standard Optics

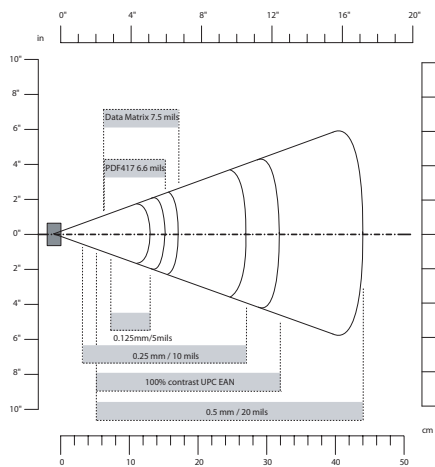

EA11 High Density Optics

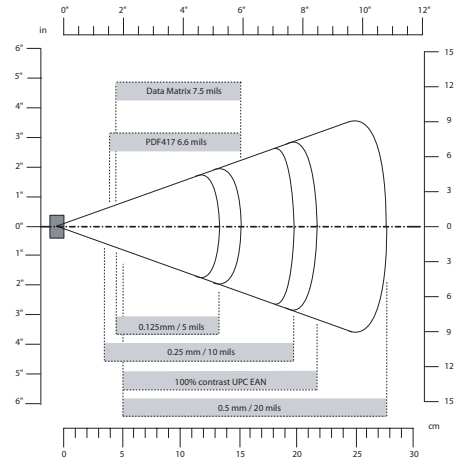

North America

Corporate Headquarters

6001 36th Avenue West
Everett, Washington 98203
Phone: (425) 348-2600
Fax: (425) 355-9551

North Latin America

Headquarters Office

Mexico
Phone: +52 55 52-41-48-00
Fax: +52 55 52-11-81-21

South Latin America

Headquarters Office

Brazil
Phone: +55 11 5502.6770
Fax: +55 11 5502.6780

Europe/Middle East & Africa

Headquarters Office

Reading, United Kingdom
Phone: +44 118 923 0800
Fax: +44 118 923 0801

Asia Pacific

Headquarters Office

Singapore
Phone: +65 6303 2100
Fax: +65 6303 2199

Internet

www.intermec.com
Worldwide Locations:
www.intermec.com/locations

Sales

Toll Free NA: (800) 934-3163
Toll in NA: (425) 348-2726
Freephone ROW:
00 800 4488 8844
Toll ROW: +44 134 435 0296

OEM Sales

Phone: (425) 348-2762

Media Sales

Phone: (513) 874-5882

Customer Service and Support

Toll Free NA: (800) 755-5505
Toll in NA: (425) 356-1799



株式会社サイレンスネット

〒222-0033 横浜市港北区新横浜2-5-9
新横浜フジカビル
tel. 045-475-1555 fax. 045-475-3275
www.silencenet.com