

[Products] you can identify with



IQ 300 M730


Omni-ID's IQ 300 labels provide on metal tag functionality, within a small, low profile, easy to deploy label. With the smallest size to performance ratio in the market, the IQ 300 also boasts a wide read performance making this an ideal choice for portal applications. Optimized for thermal barcode printers, the IQ 350 enables low cost, hassle-free RFID deployment.

Applications

With a thin profile and label presentation, Omni-ID's IQ 300 labels are ideal for on-metal applications such as:

- IT, office, hospital and laboratory asset tracking
- Logistics involving metallic packaging
- Intermodal logistics

Dimensions

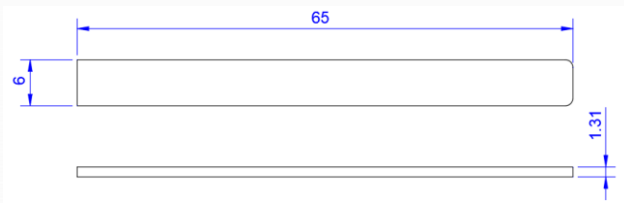


Measurements shown in mm

Physical Specifications

Material	Premium Synthetic Label
Size	65 x 6 x 1.31 mm 25 x 0.23 x 0.051 in
Weight (g)	0.279 +/-0.004
Attachment	Self Adhesive

Product dimensions shown above are the maximum. Batch to batch variation could be within 5%. Unspliced sections will be within 0.2mm tolerance.

Radiation Patterns

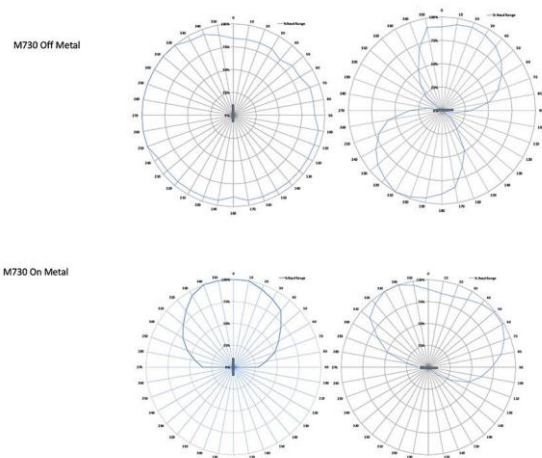

[Products] you can identify with

Environmental Specifications

Operating Temperature	-40°C to +85°C
Max Temperature Exposure	-40°C to +85°C
Application Temperature	+18°C to +35°C
IP Rating	IP68
Shock & Vibration Tolerance	MIL-STD-810 G

Certifications

CE, RoHS



Operational Specifications

Radio Protocol	EPC Class 1 Gen2v2
Frequency Range	866 – 868 MHz (EU) 902 – 928 MHz (US)
Read Range – Fixed Reader	Up to 3.9m (12.79 feet)
Read Range – Handheld Reader	Up to 2m (6.56 feet)
On Metal or Balanced	Optimized for metal
Material Compatibility	Metal
IC Type (Chip)	Impinj-M730
Memory	EPC - 128 bits User - 0 Unique TID - 48 bits

Quoted performance achieved using standard testing methodology on Aluminium test plates. Read range is dependent on multiple factors such as; RFID reader transmit power and receiver sensitivity, asset material and environment. Please see the Omni-ID On Metal Labels User Guide for more detail.
2 EPC and User memory are reprogrammable. UTID is locked at point of manufacture by IC manufacturer.

Ordering Information

Warranty	1 year
Part Number / Order Codes / Order Numbers	EU - CP 14955 US - CP14953
Supply Format	1000 labels (1 roll)
Minimum Order Quantity	Standard Label 1000 labels (1 roll) Service Bureau 1000 labels (1 roll)

株式会社サイレンスネット www.silencenet.com

〒222-0033 横浜市港北区新横浜2-5-9 新横浜フジカビル tel. 045-475-1555 fax. 045-475-3275

For product or technology inquiries email: sales@omni-id.com.
Visit omni-id.com to learn more about the complete line of **Omni-ID RFID** products