




XS DASH

Technical Specifications

- **RF protocol** EPC global Class 1 Gen 2; ISO18000-63
- **Frequency** 902-928 MHz (US); 865-868 MHz (EU)
- **IC type (chip)**¹ Impinj M830
- **Chip memory**² 128 bits EPC, 96 bits TID
- **Write cycles** 10,000 times
- **Data retention** 10 years
- **Read range** fixed³ Up to 14.76 ft (4.50 m)
- **Read range** handheld³ Up to 9.17 ft (2.80 m)
- **Polarization** Linear
- **Radiation pattern on metal**

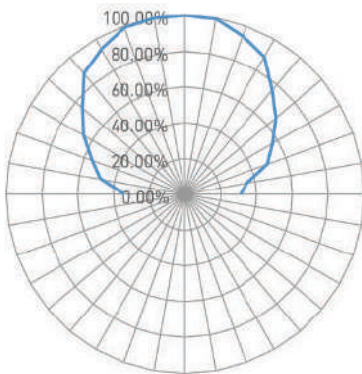

Key Features

- + **Small form factor:** fits small asset
- + **4.5 m read range:** superior performance-to-size ratio
- + **200°C:** withstand high temperatures
- + **IP68 rating:** waterproof

Applications

- Hand tools and equipments
- MRO tool control
- Weapon management

Environmental Specifications

Temperatures



- **Operational** -40°C to +85°C
-40°F to +185°F
- **Survival** -40°C to +150°C (168 hours)
-40°F to +302°F
- **Peak** 200°C (392°F, 24 hours)

- **IP rating** IP68
- **Compression strength** 790 psi (5,447 kPa)
- **Shock** 3 ft (1 m) to concrete/granite
- **Vibration** MIL-STD-810G
- **Warranty** 1 year

¹ The chip data retention is up to 10 years, based on chip operating under general environment conditions.


² EPC can be re-programmed, password protected, or permanently locked. TID is locked and unique at the point of manufacturing.

³ Performance based on standard testing methodologies. Performance may vary depending on environmental factors and reader output power.



Physical Specifications

- **Material** Ceramic
- **Dimensions (in)**¹ 0.48 x 0.12 x 0.09
- **Dimensions (mm)**¹ 12.30 x 3 x 2.20
- **Weight** 0.016 oz (0.44 g)

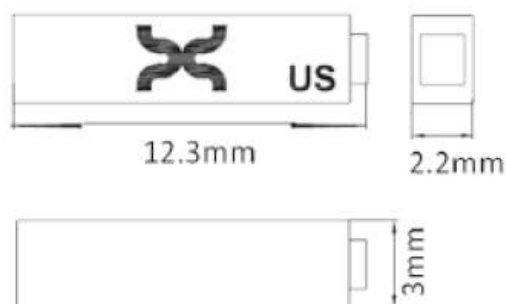

Mounting Systems

- Epoxy

Installation Instructions

To properly attach the XS Dash, the following steps should be taken:

1. Use instant glue to place the tag on the asset.
2. Cover the tag with epoxy resin to secure the tag in place. Using epoxy will both help secure the tag to the asset as well as help prevent damage from shock and impact.

¹ Tolerance: +/- 0.012; +/- 0.200

Industry Compliance



Order Information

XS Dash US: X4101-US000-M830

XS Dash EU: X4101-EU000-M830

Customization Options

Encoding

ATEX Certified Version

株式会社サイレンスネット www.silencenet.com

〒222-0033 横浜市港北区新横浜2-5-9 新横浜フジカビル tel. 045-475-1555 fax. 045-475-3275